



TEST REPORT: HDR-100-24

85~100W Ultra Slim Step Shape DIN Rail

■ DESIGN VERIFY TEST

- Output Function Test
- Input Function Test
- Protection Function Test
- Control Function Test
- Component Stress Test

■ SAFETY & E.M.C. TEST

- Safety Test
- E.M.C. Test

■ RELIABILITY TEST

- ENVIRONMENT TEST




DESIGN VERIFY TEST
OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 21.60V ~ 29.00V	I/P: 230VAC O/P: MIN LOAD TA: 25°C	CH1: 20.03V ~ 30.09V
2	OUTPUT VOLTAGE TOLERANCE (Max)	V1: 1.0% ~ -1.0%	I/P: 100VAC / 277VAC O/P: FULL / MINLOAD TA= 25°C	V1: 0.62% ~ -0.17%
3	LINE REGULATION (MAX.)	V1: 1.0% ~ -1.0%	I/P: 100VAC / 277VAC O/P: FULL LOAD TA: 25°C	V1: 0.00% ~ -0.08%
4	LOAD REGULATION(MAX.)	V1: 1.0% ~ -1.0%	I/P: 230VAC O/P: MIN LOAD ~ FULL LOAD TA: 25°C	V1: 0.21% ~ -0.17%
5	OVER/UNDERSHOOT TEST	< ±5%	I/P: 230VAC O/P: FULL LOAD TA: 25°C	TEST< 1.7 %
	RIPPLE & NOISE(Max)	V1: 150 mVp-p	I/P: 230VAC O/P: FULL LOAD TA: 25°C	V1: 37.6 mVp-p

high frequency:

low frequency:

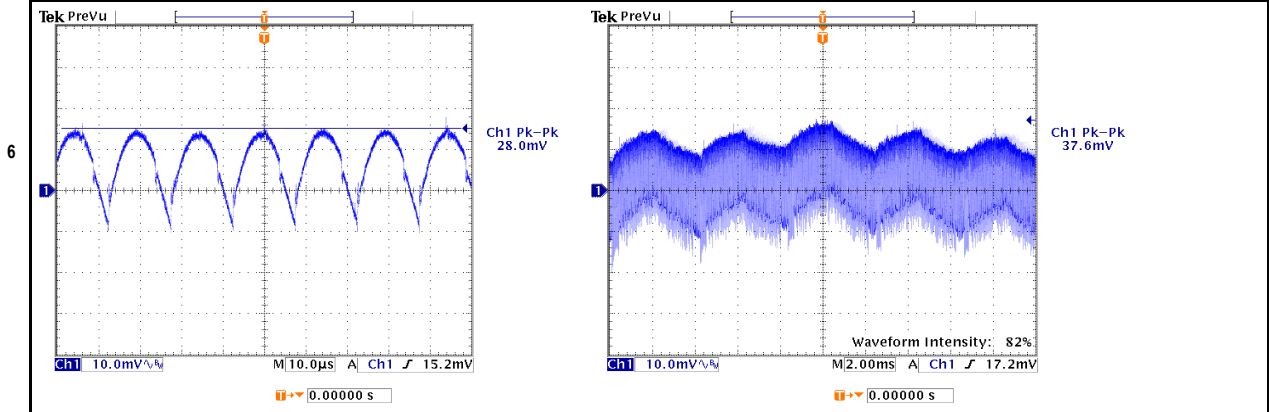


SET UP TIME (MAX.)	230VAC : 500ms 115VAC : 500ms	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 184ms 115VAC : 184ms
--------------------	----------------------------------	--	----------------------------------

INPUT=230VAC/50HZ @ FULL LOAD







CH1 : Output Voltage CH2 : AC Input Voltage

INPUT=115VAC/60HZ @ FULL LOAD

CH1 : Output Voltage CH2 : AC Input Voltage

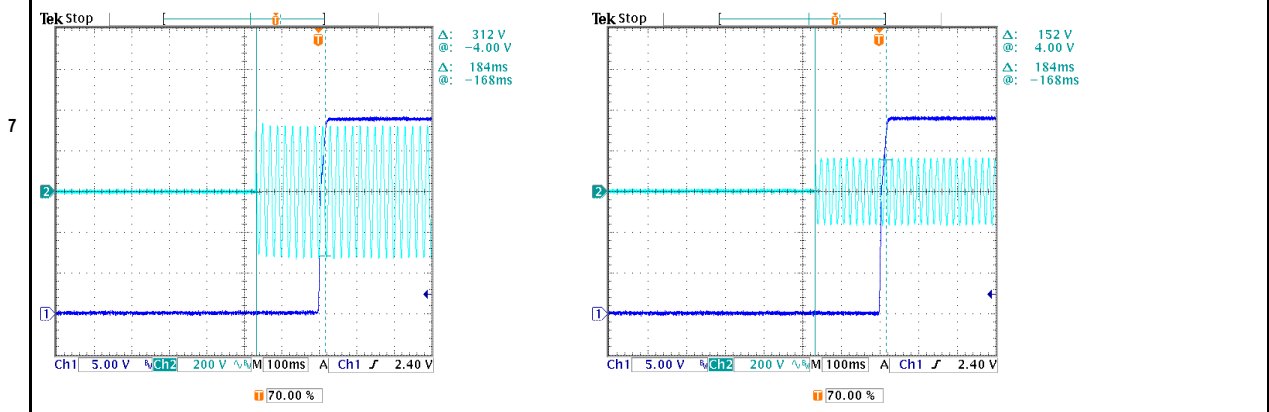

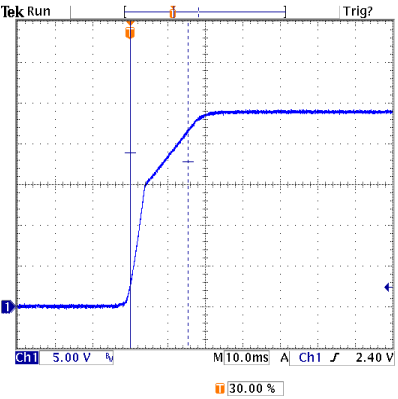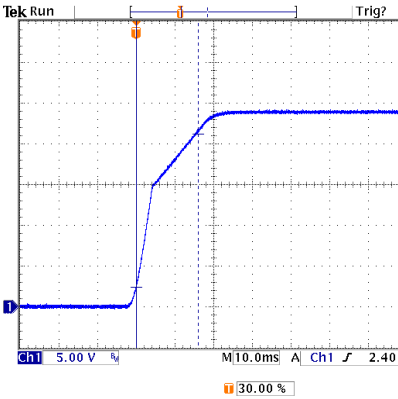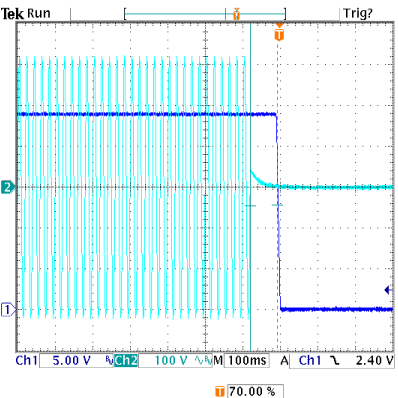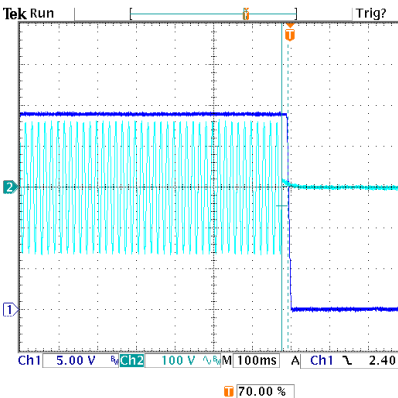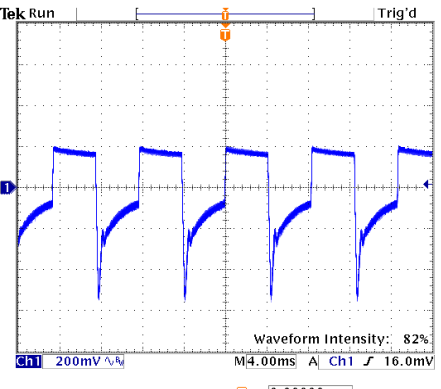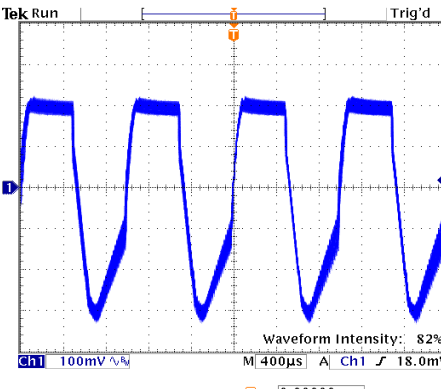


8	RISE TIME (MAX.)	230VAC : 60ms 115VAC : 60ms	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 15.4ms 115VAC : 16.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage 	
9	HOLD UP TIME (TYP.)	230VAC : 30ms 115VAC : 12ms	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA: 25°C	230VAC : 72.0ms 115VAC : 16.0ms
	INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 		INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage 	
10	DYNAMIC LOAD	V1: 2400 mVp-p	I/P: 230VAC O/P: (1)Full/Min load 50%duty/120HZ (2)Full/Min load 50%duty/1KHZ TA: 25°C	V1: (1). 752mv (2). 550mv unit:mVp-p
	FULL /MIN LOAD 50%DUTY / 120HZ 		FULL /MIN% LOAD 50%DUTY / 1KHZ 	



INPUT FUNCTION TEST


NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC ~ 277VAC 120VDC ~ 390VDC	I/P: TESTING O/P: FULL LOAD Ta: 25°C I/P: LOW-LINE = 82VAC HIGH-LINE = 300VAC O/P: FULL/MIN LOAD ON:30 Sec ; OFF:30 Sec 10MIN (POWER ON/OFF NO DAMAGE)	68.0VAC ~ 277VAC 96.2VDC ~ 390VDC TEST: OK
2	INPUT FREQUENCY RANGE	47HZ ~ 63HZ NO DAMAGE	I/P: 85VAC ~ 277VAC O/P: FULL-MIN LOAD Ta: 25°C	TEST: OK
3	INPUT CURRENT (TYP.)	1.6A / 230VAC 3A / 115VAC	I/P: 230VAC I/P: 115VAC O/P: FULL LOAD TA: 25°C	I= 0.76A / 230VAC I= 1.42A / 115VAC
5	NO LOAD POWER CONSUMPTION	< 0.30W	I/P: 230VAC O/P: MIN LOAD TA: 25°C	< 0.1239 W
	EFFICIENCY (TYP.)	90.0%	I/P: 230VAC O/P: FULL LOAD TA: 25°C	90.61 %

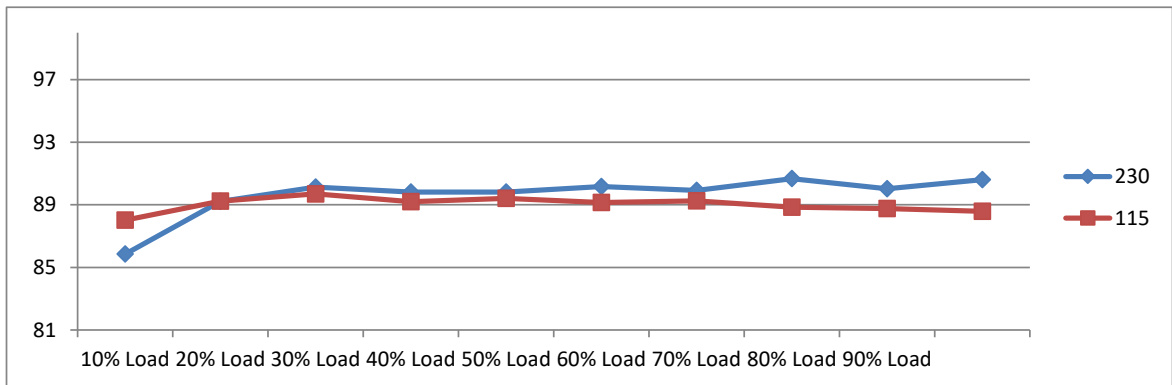

INRUSH CURRENT (TYP.)	70A / 230VAC	I/P: 230VAC	I= 41.4A / 230VAC
	35A / 115VAC	I/P: 115VAC	I= 20.0A / 115VAC
	* COLD START	O/P: FULL LOAD	T50= 720.0us / 230VAC
		TA: 25°C	

INPUT=230VAC/50HZ @ FULL LOAD INPUT=115VAC/50HZ @ FULL LOAD

CH2 : AC Input Voltage CH4 : Input current (1V=1A) CH2 : AC Input Voltage CH4 : Input current (1V=1A)

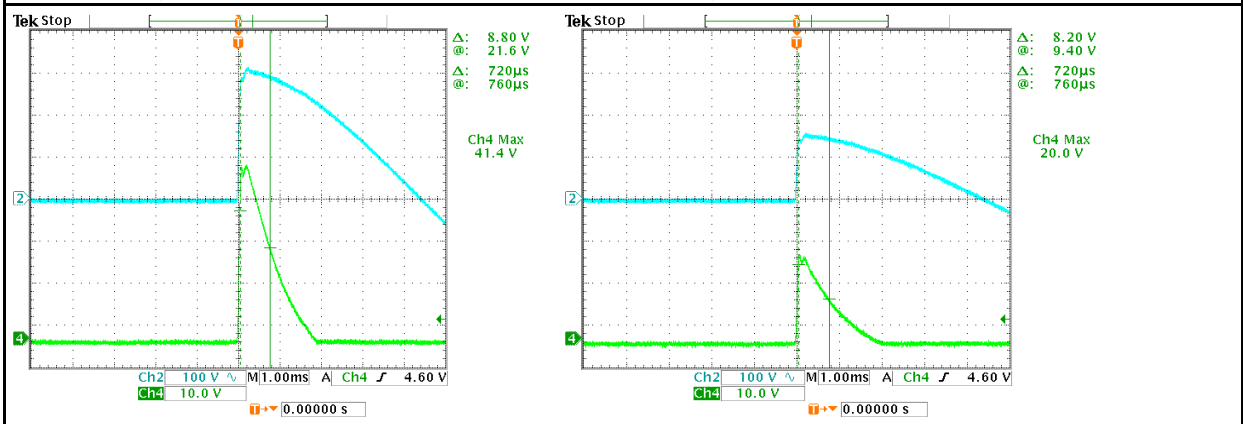



PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	102% ~ 110%	I/P: 277VAC I/P: 230VAC I/P: 100VAC O/P: TESTING TA : 25°C	107.80% 277VAC 107.80% 230VAC 107.80% 100VAC Hiccup mode when output voltage < 50%, recovers automatically after fault condition is removed; Constant current limiting within 50%~100% rated output voltage, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	30.00V ~ 36.00V	I/P: 277VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD TA : 25°C	33.01V 277VAC 33.08V 230VAC 33.08V 85VAC Shut down Re- power ON
3	OVER TEMPERATURE PROTECTION	Shut down Re- power ON	I/P: 277VAC I/P: 85VAC O/P: FULL LOAD	O.T.P. Active Shut down Re- power ON
4	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 277VAC I/P: 85VAC O/P: FULL LOAD Ta: 25°C	NO DAMAGE Hiccup mode

COMPONENT STRESS TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Power Transistor	Q1 Rated: 650V 11.0A	I/P: 280VAC VDS : O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta: 25°C	VIN: 280VAC VDS: (1). 534.00V (2). 476.00V (3). 530.00V
2	O/P MOSFET	Q100 Rated: 150V 30.0A	I/P: 280VAC VDS : O/P: (1)Full Load Turn on (2) Output Short (3)Full load continue Ta: 25°C	Q100 VDS : (1). 128.00V (2). 100.00V (3). 128.00V
3	Input Capacitor	C5 Rated: 180uf 420V	I/P: 280VAC O/P: (1)Full Load Turn on /Off (2)Min load Turn on /Off (3)Full Load /Min load Change (4)Full Load Continue Ta: 25°C	(1). 366.00V (2). 370.00V (3). 368.00V (4). 364.00V
4	Control IC	U1 Rated: 35V (max) 0V (min) U200 Rated: 38V (max) 0V (min)	I/P: 280VAC O/P: (1)Full Load (2)Output Short Change (4)O.V.P (5)Low Line No Load Vo(min) Ta: 25°C	U1 U200 (1). 20.00V 26.00V (2). 12.10V 1.07V (3). 12.20V 3.07V (4). 20.10V 25.70V (5). 19.30V 22.10V
6	Clamp Diode	D5 Rated: 1000V 2.0A	I/P: 280VAC O/P: (1)Dynamic Load Full/Min Load 90%Duty/1KHz (2)Full load continue Ta: 25°C	(1). 466.00V (2). 470.00V



■ SAFETY & E.M.C. TEST

SAFETY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4.000KVAC /min	I/P-O/P: 4.400KVAC /min Ta: 25°C	I/P-O/P: 2.38mA NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P: 500VDC>100MΩ	I/P-O/P: 600VDC Ta: 25°C/70%RH	I/P-O/P: 9999MΩ NO DAMAGE

E.M.C. TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	BS EN/EN61000-3-2 CLASS A	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS
2	CONDUCTION	BS EN/EN55032(CISPR32), CNS13438 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD / 50% LOAD Ta: 25°C	PASS Test by certified Lab
3	RADIATION	BS EN/EN55032(CISPR32), CNS13438 CLASS B	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	PASS Test by certified Lab
4	E.S.D	BS EN/EN61000-4-2 INDUSTRY AIR: 8KV / Contact: 4KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
5	E.F.T	BS EN/EN61000-4-4 INDUSTRY INPUT: 2KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A
6	SURGE	BS EN/EN61000-4-5 INDUSTRY L-N: 2KV	I/P: 230VAC /50HZ O/P: FULL LOAD Ta: 25°C	CRITERIA A

■ RELIABILITY TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																				
1	TEMPERATURE RISE TEST	MODEL: HDR-100-24																																																																						
		1. ROOM AMBIENT BURN-IN: 1HRS																																																																						
		IP: 230VAC O/P: 100% LOAD TA= 19.2°C																																																																						
		2. HIGH AMBIENT BURN-IN: 1HRS																																																																						
		IP: 230VAC O/P: 100% LOAD TA= 47.8°C																																																																						
			<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=19.2°C</th> <th>HIGH AMBIENT Ta=47.8°C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>40.7°C</td><td>68.4°C</td></tr> <tr><td>2</td><td>LF2</td><td>48.8°C</td><td>76.9°C</td></tr> <tr><td>3</td><td>BD1</td><td>49.3°C</td><td>78.6°C</td></tr> <tr><td>4</td><td>ZNR1</td><td>38.3V</td><td>67.0°C</td></tr> <tr><td>5</td><td>C5</td><td>48.2°C</td><td>77.4°C</td></tr> <tr><td>6</td><td>C40</td><td>55.3°C</td><td>83.3°C</td></tr> <tr><td>7</td><td>T1</td><td>73.5°C</td><td>99.0°C</td></tr> <tr><td>8</td><td>Q1</td><td>55.9°C</td><td>86.1°C</td></tr> <tr><td>9</td><td>Q100</td><td>82.3°C</td><td>108.7°C</td></tr> <tr><td>10</td><td>C105</td><td>66.7°C</td><td>92.9°C</td></tr> <tr><td>11</td><td>C106</td><td>66.7°C</td><td>93.7°C</td></tr> <tr><td>12</td><td>L101</td><td>75.7°C</td><td>100.7°C</td></tr> <tr><td>14</td><td>U1</td><td>62.7V</td><td>89.8°C</td></tr> <tr><td>15</td><td>D5</td><td>59.3°C</td><td>88.3°C</td></tr> <tr><td>16</td><td>D40</td><td>57.5°C</td><td>85.6°C</td></tr> <tr><td>17</td><td>RTH2</td><td>48.3°C</td><td>76.7°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=19.2°C	HIGH AMBIENT Ta=47.8°C	1	LF1	40.7°C	68.4°C	2	LF2	48.8°C	76.9°C	3	BD1	49.3°C	78.6°C	4	ZNR1	38.3V	67.0°C	5	C5	48.2°C	77.4°C	6	C40	55.3°C	83.3°C	7	T1	73.5°C	99.0°C	8	Q1	55.9°C	86.1°C	9	Q100	82.3°C	108.7°C	10	C105	66.7°C	92.9°C	11	C106	66.7°C	93.7°C	12	L101	75.7°C	100.7°C	14	U1	62.7V	89.8°C	15	D5	59.3°C	88.3°C	16	D40	57.5°C	85.6°C	17	RTH2	48.3°C	76.7°C	
		NO	Position	ROOM AMBIENT Ta=19.2°C	HIGH AMBIENT Ta=47.8°C																																																																			
		1	LF1	40.7°C	68.4°C																																																																			
		2	LF2	48.8°C	76.9°C																																																																			
		3	BD1	49.3°C	78.6°C																																																																			
		4	ZNR1	38.3V	67.0°C																																																																			
		5	C5	48.2°C	77.4°C																																																																			
		6	C40	55.3°C	83.3°C																																																																			
		7	T1	73.5°C	99.0°C																																																																			
		8	Q1	55.9°C	86.1°C																																																																			
		9	Q100	82.3°C	108.7°C																																																																			
		10	C105	66.7°C	92.9°C																																																																			
		11	C106	66.7°C	93.7°C																																																																			
12	L101	75.7°C	100.7°C																																																																					
14	U1	62.7V	89.8°C																																																																					
15	D5	59.3°C	88.3°C																																																																					
16	D40	57.5°C	85.6°C																																																																					
17	RTH2	48.3°C	76.7°C																																																																					



2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 230VAC O/P: 105.0% LOAD Ta: 25°C	TEST: OK
3	LOW TEMPERATURE TURN ON TEST	NO DAMAGE 1 HOUR (MIN)	I/P: 277VAC / 100VAC O/P: FULL LOAD Ta: -30.0°C	TEST: OK
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50°C NO DAMAGE	I/P: 285VAC O/P: FULL LOAD Ta: 50°C HUMIDITY= 95.0% RH	TEST: OK
5	TEMPERATURE COEFFICIENT	±0.03% /°C(0~50°C)	I/P: 230VAC O/P: FULL LOAD	±0.02% /°C(0~50°C)
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature: -45°C~ +90°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 5 CYCLE 5. Input/Output condition: STATIC		TEST: OK
7	THERMAL SHOCK TEST	1. Thermal shock Temperature: -35°C ~ 55°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle: 16 CYCLE 5. Input/Output condition: 230VAC Full Load AC ON/OFF test turn on 3sec; turn off 1sec @ 15cycle Full Load burn in@ 1cycle		TEST: OK
8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform: Sine Wave (2) Frequency: 10~500Hz (4) Acceleration: 2G (5) Test Time: 60min in each axis (X.Y.Z) (6) Ta: 25°C		TEST: OK
9	CAPACITOR LIFE CYCLE	:SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P: 230VAC O/P : FULL LOAD Ta= 25°C LIFE TIME (2) I/P: 230VAC O/P : FULL LOAD Ta= 50°C LIFE TIME (3) I/P: 230VAC O/P : 75% LOAD Ta= 50°C LIFE TIME (4) I/P: 230VAC O/P : 50% LOAD Ta= 50°C LIFE TIME		(1). 128860 HRS (2). 25474 HRS (3). 48115 HRS (4). 94380 HRS
10	MTBF	3271.9K hrs min. Telcordia SR-332 (Bellcore) ; 856.5K hrs min. MIL-HDBK-217F(25°C)		
11	DMTBF /Accelerated Life test	Demonstration Mean Time Between Failure (Expected Life): 30000HRS @ TA 50°C O/P: FULL LOAD		

TEST RESULT	TESTER	REVIEW	APPROVAL
PASS	FRANK	GESG	WANGDZ

2007/3/20 A50-S014