



# Test Report: LRS-50-3.3

---

50W Single Output Switching Power Supply

## ■ DESIGN VERIFY TEST

Output Function Test

Input Function Test

Protection Function Test

Component Stress Test

## ■ SAFETY & E.M.C. TEST

Safety Test

E.M.C. Test



## ■ RELIABILITY TEST

ENVIRONMENT TEST

## DESIGN VERIFY TEST

### OUTPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OUTPUT VOLTAGE ADJUST RANGE	CH1: 2.97 V~ 3.6 V	I/P : 230 VAC I/P : 115 VAC O/P : MIN LOAD Ta : 25°C	2.912~3.7975V/230VAC 2.923V~3.805V/115VAC
2	OUTPUT VOLTAGE(Max) TOLERANCE	V1: 3 %~ -3 %	I/P: 100VAC /264VAC O/P:FULL/ MIN. LOAD Ta:25°C	V1: -0.2923%~0.2923 %
3	LINE REGULATION (Max)	V1: 0.5 %~ -0.5 %	I/P: 100VAC~ 264VAC O/P:FULL LOAD Ta:25°C	V1: 0 %~ 0 %
4	LOAD REGULATION(Max)	V1: 2 %~ -2 %	I/P: 230VAC O/P:FULL -MIN LOAD Ta:25°C	V1: -0.2923 %~0.2923 %
5	OVER/UNDERSHOOT TEST	< ±10%	I/P: 230VAC O/P:FULL LOAD Ta:25°C	<10%
6	RIPPLE & NOISE(Max)	V1: 80 mVp-p	I/P:230VAC O/P:FULL LOAD Ta:25°C	V1: 30.4 mVp-p

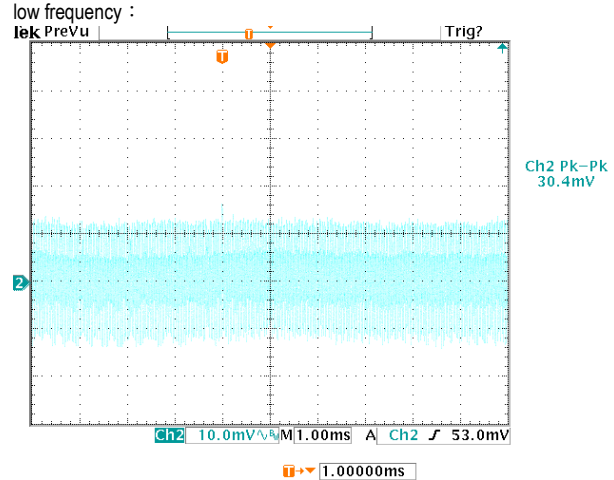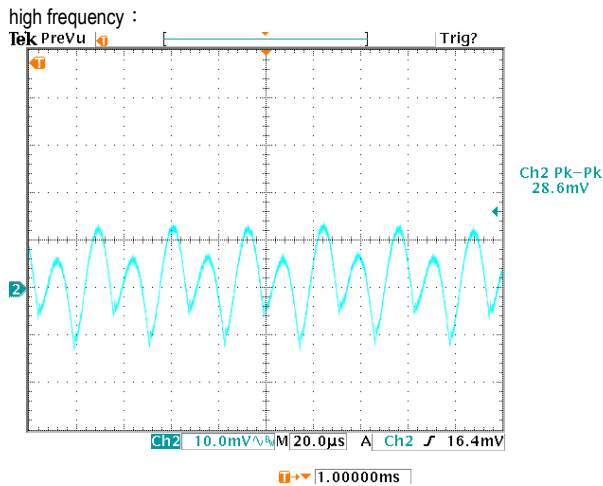

7	SET UP TIME(Max)	230VAC/1000ms 115VAC/2000ms	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	230VAC/392 ms 115VAC/600 ms
---	------------------	--------------------------------	--	--------------------------------

INPUT=230VAC/50HZ @ FULL LOAD  
CH1 : Output Voltage CH2 : AC Input Voltage


INPUT=115VAC/60HZ @ FULL LOAD  
CH1 : Output Voltage CH2 : AC Input Voltage



# 50W Single Output Switching Power Supply


# LRS-50 series

<p><b>8</b> RISE TIME (Max)</p>	<p>230VAC/30ms 115VAC/30ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/ 12.2 ms 115VAC/ 11.8 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage</p>	
<p><b>9</b> HOLD UP TIME (Typ.)</p>	<p>230VAC/30ms 115VAC/12ms</p>	<p>I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C</p>	<p>230VAC/36 ms 115VAC/23.2 ms</p>
<p>INPUT=230VAC/50HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>		<p>INPUT=115VAC/60HZ @ FULL LOAD CH1 : Output Voltage CH2 : AC Input Voltage</p>	

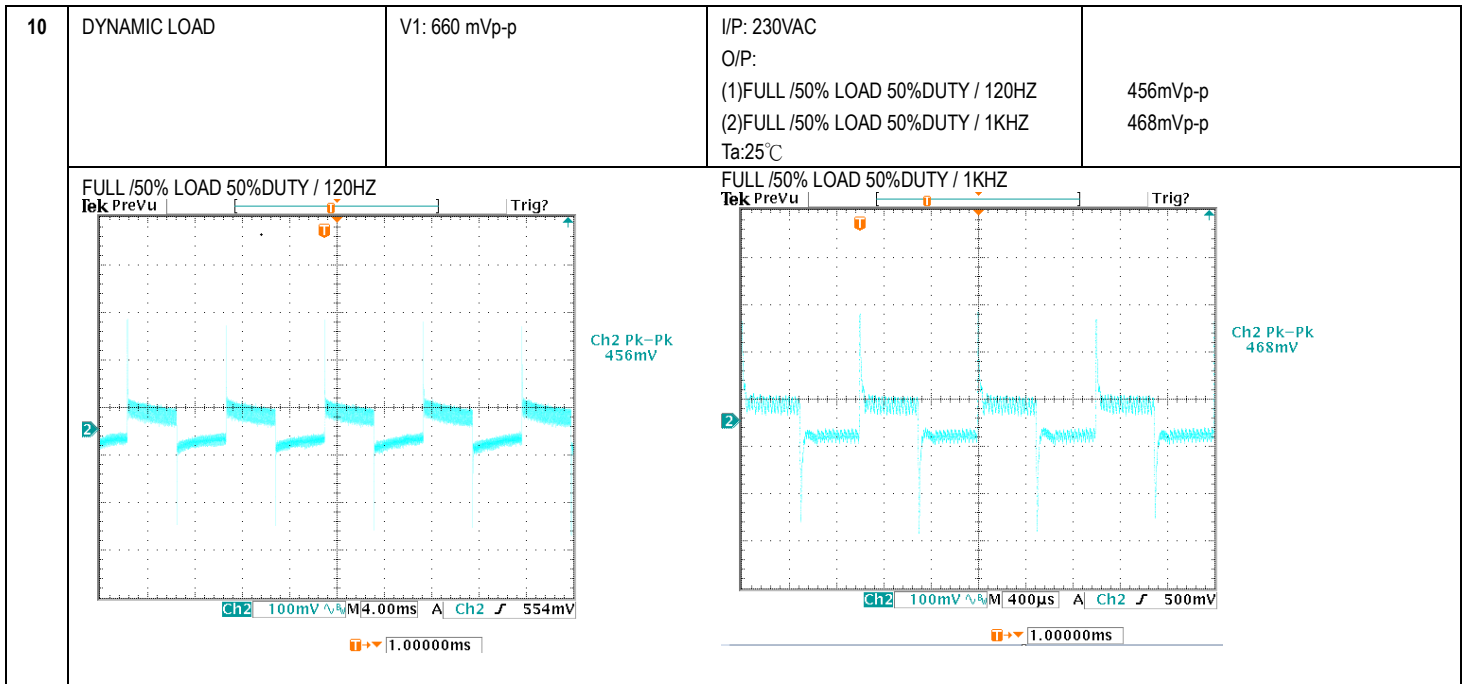

## INPUT FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	INPUT VOLTAGE RANGE	85VAC~264VAC 120VDC~373VDC	I/P:TESTING O/P:FULL LOAD Ta:25°C	78VAC~264VAC 113VDC~373VDC
			I/P: (1)LOW-LINE-3V=82 V HIGH-LINE+15%=300 V O/P:FULL/MIN LOAD (PLEASE CHECK DERATING CURVE) ON: 30 Sec OFF: 30 Sec 10MIN (2)230Vac ON: 0.5 Sec OFF: 0.5 Sec 20MIN (3)230Vac ON:3Sec OFF:3Sec 12HOURS (POWER ON/OFF NO DAMAGE)	TEST:OK
2	INPUT FREQUENCY RANGE	47HZ ~63 HZ NO DAMAGE	I/P:100 VAC ~264 VAC O/P:FULL~MIN LOAD Ta:25°C	TEST: OK
3	INPUT CURRENT (Typ.)	230V/ 0.56A 115V/ 0.95A	I/P : 230 VAC I/P : 115 VAC O/P : FULL LOAD Ta : 25°C	I =0.34258A/ 230VAC I =0.562A/ 115VAC
4	LEAKAGE CURRENT	<0.75 mA / 240 VAC	I/P : 240 VAC O/P : Min LOAD Ta : 25°C	L-FG : 0.32 mA N-FG : 0.32 mA
5	NO LOAD CONSUMPTION	< 0.3W	I/P : 115VAC I/P : 230VAC O/P : NO LOAD Ta : 25°C	< 0.1547 W < 0.1621 W
6	EFFICIENCY(Typ.)	80%	I/P:230 VAC O/P:FULL LOAD Ta:25°C	80.91%

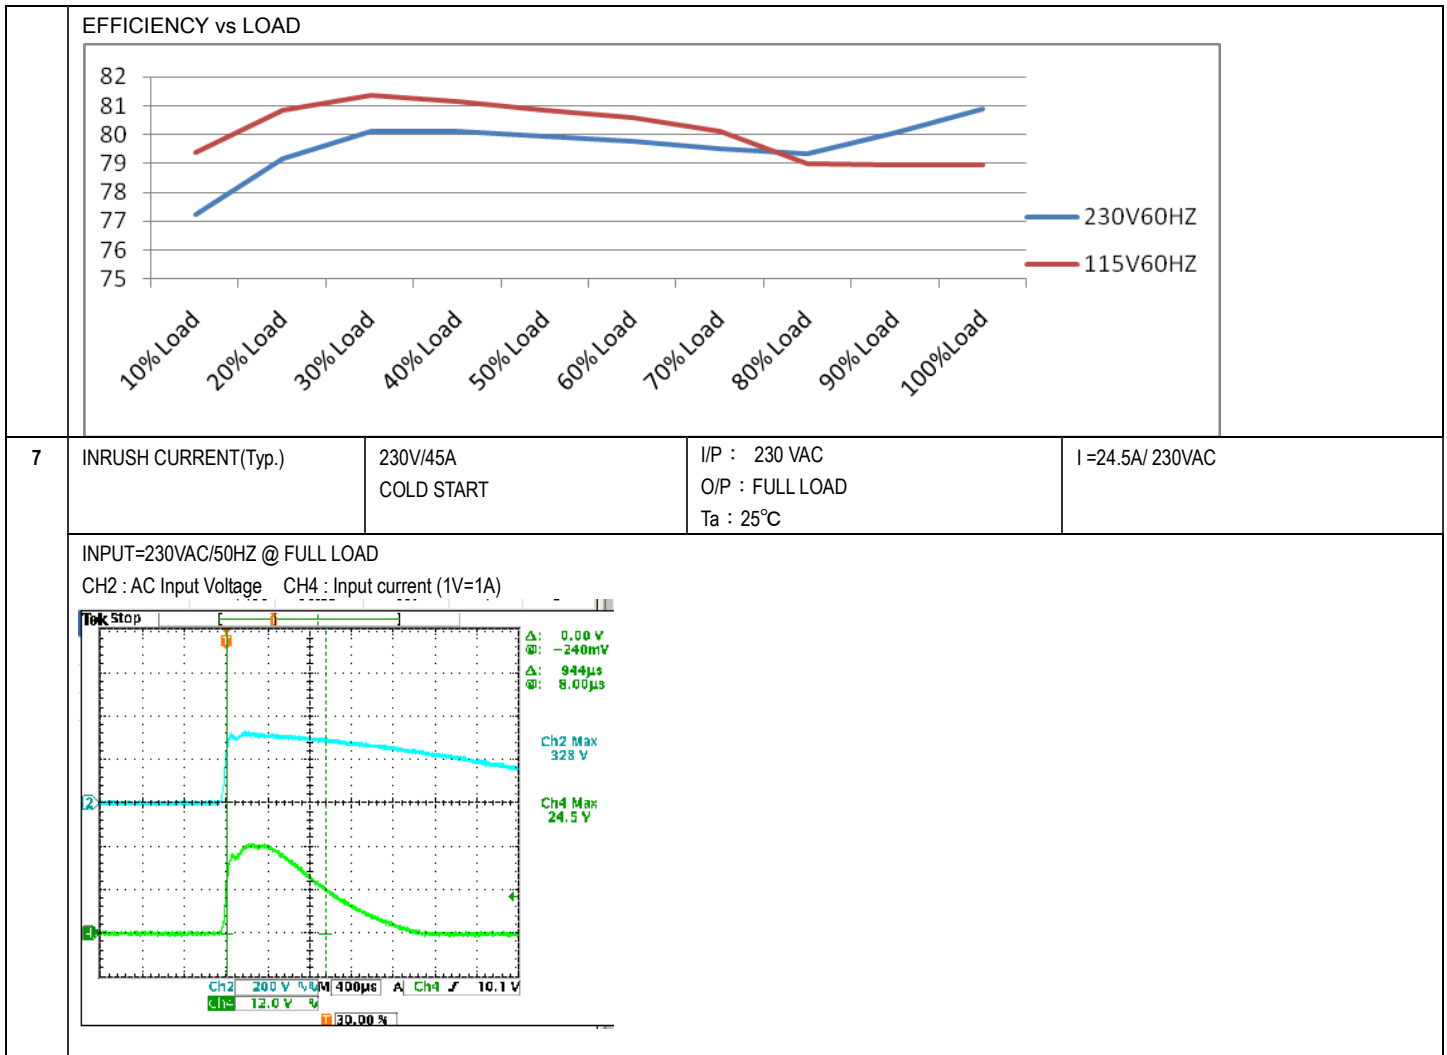

## PROTECTION FUNCTION TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	OVER LOAD PROTECTION	110 %~ 150 %	I/P: 264VAC I/P: 230VAC I/P: 100VAC O/P: TESTING Ta:25°C	128.4%/ 264VAC 130.1%/ 230VAC 129.8%/100VAC PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed
2	OVER VOLTAGE PROTECTION	3.8 V~4.45 V	I/P: 264VAC I/P: 230VAC I/P: 85VAC O/P: MIN LOAD Ta:25°C	4.36V/ 264VAC 4.36V/ 230VAC 4.36V/ 85VAC PROTECTION TYPE : Shut down o/p voltage, re-power on to recover
3	SHORT PROTECTION	SHORT EVERY OUTPUT 1 HOUR NO DAMAGE	I/P: 264VAC I/P: 85VAC O/P: FULL LOAD Ta:25°C	NO DAMAGE PROTECTION TYPE : Hiccup mode, recovers automatically after fault condition is removed

**COMPONENT STRESS TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	PWM Transistor (D to S) or (C to E) <b>Peak Voltage</b>	Q 1 Rated 10A/ 600 V	I/P:High-Line +3V =267V AC ON/OFF VDS: O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. Ta:25°C	VDS: (1)526V (2)476V (3)523V (4)524V (5)518V (6)540V (7)510V
2	<b>Diode Peak Voltage</b>	Q100 Rated 75A/60 V	I/P:High-Line +3V =267 V AC ON/OFF O/P: (1)Full Load (2)Output Short (3)Dynamic Load Full Load/ Min. Load 90%Duty/1KHz (4)Dynamic Load Full Load/ Min. Load 90%Duty/3KHz (5)Dynamic Load Full Load/ Min. Load 90%Duty/5KHz (6)Dynamic Load 100% Load/ Min. Load 50%Duty/120Hz (7)0%→400% Load. (8).NO LOAD (8).NO LOAD Ta:25°C	Q100: VDS: (1)34.8V (2)32.2V (3)35.2V (4)35.2V (5)35.0V (6)35.0V (7)34.8V (8)35.2V
3	<b>Input Capacitor Voltage</b>	C5 Rated: 100u/400V 105°C 18*25 CLA IIR	I/P:High-Line +3V =267 V O/P: (1)Full Load input on/off (2) Min load input on /Off (3)Full Load /Min load Change Ta:25°C	(1)374V (2)376V (3)376V
4	<b>Control IC Voltage Test</b>	PWM IC U1 Rated 10.8 V~30V	I/P:High-Line +3V =267 V AC ON/OFF O/P(1)FULL LOAD (2) Output Short (3)O.L.P (4)O.V.P. (5)NO LOAD VR Min. LOW LINE Ta:25°C	(1) 24.8V (2) 16.8V (3) 27.3V (4) 18.4V (5) 13.6V
5	<b>Clamp Diode Peak Voltage</b>	D5 Rated : 3A/600V	I/P : High-Line +3V = 267 V AC ON/OFF O/P : (1) Dynamic Load 90%Duty/1KHz (2)Full load continue Ta : 25°C	(1)388 V (2)390 V

**SAFETY TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC/min I/P-FG :2KVAC/min O/P-FG:1.25KVAC/min	I/P-O/P: 4.4KVAC/min I/P-FG: 2.4 KVAC/min O/P-FG:1.5 KVAC/min Ta:25°C	I/P-O/P:2.135mA I/P-FG: 2.098 mA O/P-FG:2.065m A NO DAMAGE
2	ISOLATION RESISTANCE	I/P-O/P:500VDC>100MΩ I/P-FG: 500VDC>100MΩ O/P-FG:500VDC>100MΩ	I/P-O/P: 500 VDC I/P-FG: 500 VDC O/P-FG: 500 VDC Ta:25°C	I/P-O/P: 9999MΩ I/P-FG: 9999MΩ O/P-FG: 9999MΩ NO DAMAGE
3	GROUNDING CONTINUITY	FG(PE) TO CHASSIS OR TRACE < 100 mΩ	40A / 2min Ta:25°C	8mΩ

**E.M.C TEST**

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT
1	HARMONIC	EN61000-3-2 CLASS A	I/P:230VAC/50HZ O/P:100%LOAD Ta:25°C	PASS
2	CONDUCTION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL/50% LOAD Ta : 25°C	PASS Test by certified Lab
3	RADIATION	EN55022 CLASS B	I/P : 230 VAC (50HZ) O/P : FULL LOAD Ta : 25°C	PASS Test by certified Lab
4	E.S.D	EN61000-4-2 INDUSTRY AIR : 8KV / Contact : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
5	E.F.T	EN61000-4-4 INDUSTRY INPUT : 2KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
6	SURGE	IEC61000-4-5 INDUSTRY L-N : 2KV L,N-PE : 4KV	I/P : 230 VAC/50HZ O/P : FULL LOAD Ta : 25°C	CRITERIA A
7	Test by certified Lab & Test Report Prepare			

RELIABILITY TEST

ENVIRONMENT TEST

NO	TEST ITEM	SPECIFICATION	TEST CONDITION	RESULT																																																																
1	TEMPERATURE RISE TEST	MODEL : LRS-50-5 1. ROOM AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=27.0°C 2. HIGH AMBIENT BURN-IN : 2 HRS I/P : 230VAC O/P : FULL LOAD Ta=43.1°C																																																																		
				<table border="1"> <thead> <tr> <th>NO</th> <th>Position</th> <th>ROOM AMBIENT Ta=27.0°C</th> <th>HIGH AMBIENT Ta=43.1 °C</th> </tr> </thead> <tbody> <tr><td>1</td><td>LF1</td><td>60.7°C</td><td>78.7°C</td></tr> <tr><td>2</td><td>BD1</td><td>68.1°C</td><td>85.1°C</td></tr> <tr><td>3</td><td>C5</td><td>65.3°C</td><td>82.8°C</td></tr> <tr><td>4</td><td>D5</td><td>93.2°C</td><td>105.1°C</td></tr> <tr><td>5</td><td>Q1</td><td>85.4°C</td><td>99.5°C</td></tr> <tr><td>6</td><td>C35</td><td>80.2°C</td><td>96.3°C</td></tr> <tr><td>7</td><td>T1coil</td><td>79.7°C</td><td>96.9°C</td></tr> <tr><td>8</td><td>T1core</td><td>87.4°C</td><td>104.1°C</td></tr> <tr><td>9</td><td>C105</td><td>73.0°C</td><td>87°C</td></tr> <tr><td>10</td><td>C106</td><td>68.4°C</td><td>82°C</td></tr> <tr><td>11</td><td>L100</td><td>80.4°C</td><td>97.6°C</td></tr> <tr><td>12</td><td>Q100</td><td>73.7°C</td><td>88.3°C</td></tr> <tr><td>13</td><td>U1</td><td>80.2°C</td><td>95.9°C</td></tr> <tr><td>14</td><td>D30</td><td>93.2°C</td><td>106.1°C</td></tr> <tr><td>15</td><td>D40</td><td>62.4°C</td><td>79.4°C</td></tr> </tbody> </table>	NO	Position	ROOM AMBIENT Ta=27.0°C	HIGH AMBIENT Ta=43.1 °C	1	LF1	60.7°C	78.7°C	2	BD1	68.1°C	85.1°C	3	C5	65.3°C	82.8°C	4	D5	93.2°C	105.1°C	5	Q1	85.4°C	99.5°C	6	C35	80.2°C	96.3°C	7	T1coil	79.7°C	96.9°C	8	T1core	87.4°C	104.1°C	9	C105	73.0°C	87°C	10	C106	68.4°C	82°C	11	L100	80.4°C	97.6°C	12	Q100	73.7°C	88.3°C	13	U1	80.2°C	95.9°C	14	D30	93.2°C	106.1°C	15	D40	62.4°C	79.4°C
NO	Position	ROOM AMBIENT Ta=27.0°C	HIGH AMBIENT Ta=43.1 °C																																																																	
1	LF1	60.7°C	78.7°C																																																																	
2	BD1	68.1°C	85.1°C																																																																	
3	C5	65.3°C	82.8°C																																																																	
4	D5	93.2°C	105.1°C																																																																	
5	Q1	85.4°C	99.5°C																																																																	
6	C35	80.2°C	96.3°C																																																																	
7	T1coil	79.7°C	96.9°C																																																																	
8	T1core	87.4°C	104.1°C																																																																	
9	C105	73.0°C	87°C																																																																	
10	C106	68.4°C	82°C																																																																	
11	L100	80.4°C	97.6°C																																																																	
12	Q100	73.7°C	88.3°C																																																																	
13	U1	80.2°C	95.9°C																																																																	
14	D30	93.2°C	106.1°C																																																																	
15	D40	62.4°C	79.4°C																																																																	
2	OVER LOAD BURN-IN TEST	NO DAMAGE 1 HOUR ( MIN )	I/P : 230 VAC O/P : 130% LOAD Ta : 25°C	TEST : OK																																																																
3	LOW TEMPERATURE TURN ON TEST	TURN ON AFTER 2 HOUR	1. I/P : 264VAC/ O/P : 100 % LOAD 2. I/P : 100VAC/ O/P : 75 % LOAD/75% Ta= -30°C	TEST : OK																																																																
4	HIGH HUMIDITY HIGH TEMPERATURE HIGH VOLTAGE TURN ON TEST	AFTER 12 HOURS IN CHAMBER ON CONTROL 50 °C NO DAMAGE	I/P : 272 VAC O/P : FULL LOAD Ta= 50 °C HUMIDITY= 95 %R.H	TEST : OK																																																																
5	TEMPERATURE COEFFICIENT	± 0.03 %/°C (0~50°C)	I/P : 230 VAC O/P : FULL LOAD	±0.02%/°C (0~50°C)																																																																
6	STORAGE TEMPERATURE TEST	1. Thermal shock Temperature : -40°C~ +85°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 5 CYCLE 5. Input/Output condition : STATIC		OK																																																																
7	THERMAL SHOCK TEST	1. Thermal shock Temperature : -30°C~ 70°C 2. Temperature change rate : 25°C / MIN 3. Dwell time low and high temperature : 30 MIN/EACH 4. Total test cycle : 10 CYCLE 5. Input/Output condition : 230VAC/Full Load AC ON/OFF TEST turn on 58sec ; turn off 2sec		OK																																																																





# 50W Single Output Switching Power Supply

# LRS-50 series

8	VIBRATION TEST	1 Carton & 1 Set (1) Waveform : Sine Wave (2) Frequency : 10~500Hz (3) Sweep Time : 10min/sweep cycle (4) Acceleration : 5G (5) Test Time : 60min in each axis (X.Y.Z) (6) Ta : 25°C	TEST : OK
9	CAPACITOR LIFE CYCLE	SUPPOSE C105 IS THE MOST CRITICAL COMPONENT (1) I/P : 230VAC O/P : FULL LOAD Ta= 25 °C LIFE TIME (2) I/P : 230VAC O/P : FULL LOAD Ta= 50 °C LIFE TIME (3) I/P : 230VAC O/P : 75% LOAD Ta=50 °C LIFE TIME (4) I/P : 230VAC O/P : 50% LOAD Ta= 50 °C LIFE TIME	(1) 90182HRS (2) 26047HRS (3) 82411HRS (4) 153720HRS
10	MTBF	3149.8K hrs min. Telcordia SR-332 (Bellcore) ; 561.6Khrs min. MIL-HDBK-217F (25°C)	
11	DMTBF/Accelerated Life Test	Demonstration Mean Time Between Failure (Expected Life): Above 30,000 hours @ TA 50°C	

TEST RESULT	TESTER	APPROVAL
PASS	FRANK	WANGDZ

2007/3/20 A50-S014